


8-port Gigabit PoE Smart Switch with AF PoE + 2 SFP

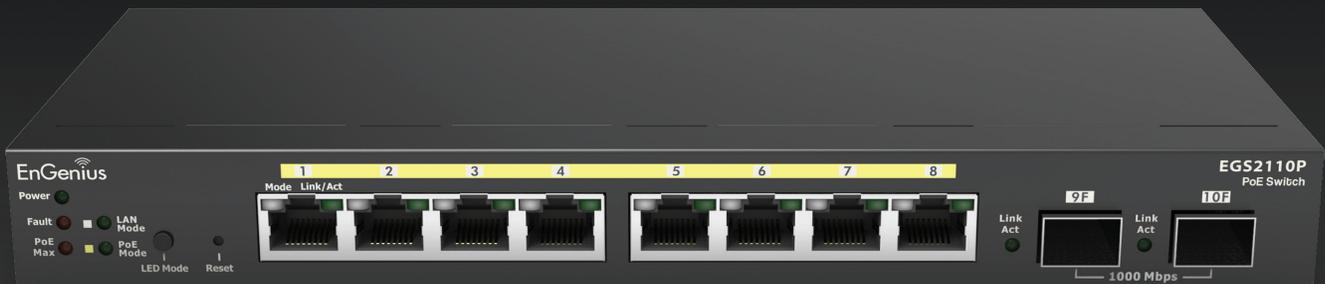

Gigabit Speed for Small Businesses

The EGS2110P is a Smart PoE Switch that offers 8 Gigabit ports with IEEE802.3af PoE Support on all its ports and 2 SFP slots for fiber uplinks.

Power Over Ethernet (PoE)

EnGenius Smart PoE (Power-over-Ethernet) Gigabit Switches are specifically designed to meet the needs of start-up and small-to-medium sized businesses. It's ideal for companies that need a way to connect and power VoIP phone systems, IP Cameras and Wireless Access Points throughout their facilities. These robust and fully-managed, yet cost-effective switches will help to keep their employees connected, safe and productive. The EGS2110P delivers up to 15.4 watts over connected Ethernet cables to powered devices. Total PoE budget is 61.6 watts.

Management

EnGenius switches also include embedded QoS intelligence to prioritize delay-sensitive services such as voice and video, simplify unified communications deployments, and help ensure consistent network performance for all services. For example, automated voice VLAN capabilities let you plug any IP phone into your IP telephone network and receive an immediate dial tone.

Key Features

- + 8 Gigabit ports with IEEE802.3af PoE support
- + 2 SFP slots
- + External Power Adapter with 61.6w PoE Budget
- + Provides PoE Management on all ports
- + Loopback Detection
- + IGMP Snooping
- + Bandwidth Control
- + IEEE802.1Q VLAN
- + IEEE802.1p QoS



Technical Specifications

Standard

Switching Capacity: 20 Gbps
Max. Forwarding Rate (64kBytes): 14.88Mpps
Forwarding Mode: Store and Forward
Packet Buffer memory: 512K Bytes
Flash Memory: 4 MB

Port Functions

8 10/100/1000Mbps Ports in the front panel
2 1000Mbps SFP Slot

PoE Capability

PoE standard: Port 1~8 Support IEEE 802.3af
PoE Capable Ports: Port 1~8 can output up to 15.4W
PoE budget: 61.6 Watts

LED Indicator

Device:

- Power LED x1
- Fault LED x1
- PoE Max LED x1
- LAN Mode LED x1
- PoE Mode LED x1

SFP/Copper Ports:

- LAN/PoE Mode, Link/Act

IGMP Snooping v1/v2

Port Mirroring: one to one and many to one

Static MAC Address

Dynamic MAC List

Bandwidth Control

802.1Q VLAN

Port-based VLAN

Storm Control

PoE Management

Power on/off per port

Power Class Configuration

Power feeding with priority

User defined power limit

BootP/DHCP Client

Firmware Burn-Proof

Cable Diagnostic

Environment & Mechanical

Temperature Range

Operating: 32 to 104°F / 0 to 40°C
Storage: -40 to 158°F / -40 to 70 °C

Humidity (non-condensing)

5% - 95%

L2 Features

Loopback Detection

Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range may vary depending on many factors including environmental conditions, distance between devices, radio interference in the operating environment, and mix of devices in the network. Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright © 2013 EnGenius Technologies, Inc. All rights reserved.